



Smart concept; Smart design

Bright, Stylish & Compact



Light Output
2500lm

Front Exhaust

Digital Connectivity
(EB-X8/W8 only)

Auto Keystone
(EB-X8/W8 only)

The Epson EB-S8/X8/W8 projectors offer a stylish new design and impressive performance. A powerful 2500 lumens enables use in bright environments, and with a wide variety of input options, compatibility with a broad range of multimedia input devices including computers, DVD players and gaming consoles is ensured.

- AV Mute Slide Lens Shutter
- Professional carry case
- Quick, 5 sec Start-up/Instant Off
- 5000 hour E-TORL long-life lamp*
- Wide ranging connectivity including HDMI + USB
- Low power Consumption

*E-TORL Epson-Twin Optimize Reflection Lamp




Multimedia Projector EB-S8/EB-X8/EB-W8

Digital Connectivity (EB-X8/W8 only)

Projecting the highest quality digital images is made possible thanks to the inclusion of an HDMI terminal on both the Epson EB-X8 and W8.

Connection to a PC via USB cable is simple with Epson's USB display feature. You can even view a J-PEG slide show directly from a USB memory device without the need for a PC.

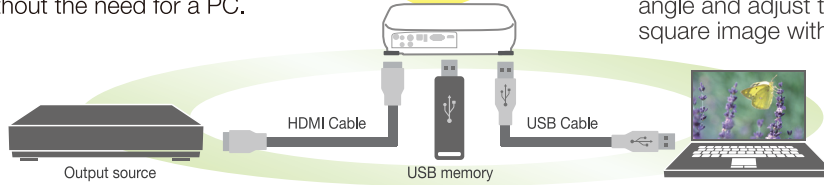

Front Exhaust

Positioning the projector exhaust in the front of the projector means no irritating hot air flow effecting the audience during desktop usage.



Auto Keystone Correction (X8/W8 only)

The EB-X8 and W8 automatically detect the projector's vertical angle and adjust the vertical keystone distortion ensuring a sharp square image without the need for complicated adjustments

SUPPLIED ACCESSORIES

Power Cable 1.8m
Remote Control
With AA type alkaline batteries x 2pcs
Computer Cable
1.8m <6 ft>, AHD-15 pin type slim-cable
Soft Carrying Case
Password Protect Sticker
Owner's Manual

OPTIONAL ACCESSORIES


ELPLP54	Spare Lamp
ELPAF25	Air Filter Set

SPECIFICATIONS

Specification of		EB-S8	EB-X8	EB-W8	
Main Parts	LCD	Size	0.55 inch (x 3)	0.55 inch (x 3)	0.59 inch (x 3)
	Projection Lens	Pixel Number	480,000 dots (800 x 600) x 3	786,432 dots (1024 x 768) x 3	1,024,000 dots (1280 x 800) x 3
		Native Resolution	SVGA	XGA	WXGA
Lamp	Type	Manual focus & 1.35x digital zoom		Manual focus & 1.2x optical zoom	
	Life	F=1.44 / F=16.6mm		F=1.58 - 1.72 / F=16.9 - 20.28mm	
		Lamp	200W UHE		
		Life	4000 hours (High Brightness mode) / 5000 hours (Eco Brightness mode)		
Screen Size		30 to 350 inch [0.87 to 10.5m]	30 to 300 inch [0.9 to 9.0m]	33 to 318 inch [0.9 to 9.0m]	
Offset		8:1		6:1	
Light Output*	Brightness Control Normal / Eco	2500 lm / 1960 lm			
Colour Light Output*		2500 lm / 1960 lm			
Contrast*		2000:1			
Sound Output		1W monaural			
Auto Keystone Correction		N/A	Yes		
Analog RGB	Input Terminal	Video	D-sub 15-pin x 1		
	Output Terminal	Audio	Stereo Mini x 1	RCA x 1 (White / Red)	
Video	Input Terminal	Video	Composite Video: RCA (Yellow) x 1		
			S-Video: Mini DIN x 1		
			Component Video: D-sub 15-pin x 1 (in common with Analog RGB connector)		
			RGB Video: D-sub 15-pin x 1 (in common with Analog RGB connector)		
	Audio	Stereo Mini x 1 (in common with Analog RGB Audio terminal)	RCA x 1 (White/Red) (in common with Analog RGB Audio terminal)		
Digital Input Terminal	Video & Audio	N/A	HDMI x 1		
Control Terminal	Terminal	USB Type B x 1			
Memory Terminal	Terminal	N/A	USB Type A x 1		
Operating Temperature		5°C to 35°C <41°F to 95°F>			
Operating Altitude		Up to 7,500 feet <2,286m> (over 4,921 feet <1,500m> area: with High Altitude mode)			
Start-Up Period		About 5 sec.			
Direct Power On		Yes			
Cool-Down Period		Instant off			
Power Supply Voltage		100 - 240V AC +/- 10%, 50/60Hz			
Power Consumption	100-120V	Lamp on	280W		
		Stand by	0.3W (Communication Off)		
	220-240V	Lamp on	265W		
		Stand by	0.4W (Communication Off)		
Dimensions Exclude Feet (D x W x H)		228 x 295 x 77			
Weight		Approx. 5.1 lbs. / 2.3kg			
Fan Noise	Brightness Control : Normal / Eco	37dB / 29dB			

*Light Output/Colour Light Output/Contrast --- Colour mode: Dynamic, Zoom: Wide

CONNECTOR PANEL (EB-S8)



CONNECTOR PANEL (EB-X8 / W8)



CONNECTOR PANEL

1	Audio Out
2	Audio Input
3	S-Video Input
4	Video Input
5	USB (Type B)
6	Computer Input
7	Video -L Input
8	Video -R Input
9	USB (Type A)
10	HDMI

PROJECTION DISTANCE (EB-S8)

4:3 Screen size	Shortest (Wide)	Longest (Tele)	Offset (Wide)	Offset (Tele)
X (screen size / dimension)	Y (cm / inch)		Z (cm / inch)	Z (cm / inch)
60" / 120cm x 91cm 47.2" x 35.4"	117 / 70	240 / 95	10 / 3.9	3 / 1
80" / 160cm x 120cm 63.0" x 47.2"	237 / 93	321 / 126	13 / 5.2	3 / 1.3
100" / 200cm x 150cm 78.7" x 59.1"	297 / 117	402 / 158	17 / 6.5	4 / 1.7
200" / 410cm x 300cm 161.4" x 118.1"	597 / 235	807 / 318	33 / 13.1	9 / 3.4

PROJECTION DISTANCE (EB-X8)

4:3 Screen size	Shortest (Wide)	Longest (Tele)	Offset
X (screen size / dimension)	Y (cm / inch)		Z (cm / inch)
60" / 120cm x 91cm 47.2" x 35.4"	180 / 71	217 / 85	10 / 4
80" / 160cm x 120cm 63.0" x 47.2"	241 / 95	290 / 114	14 / 5.3
100" / 200cm x 150cm 78.8" x 59.1"	302 / 119	363 / 143	17 / 6.7
200" / 410cm x 300cm 161.4" x 118.1"	607 / 239	729 / 287	34 / 13.3

PROJECTION DISTANCE (EB-W8)

16:10 Screen size	Shortest (Wide)	Longest (Tele)	Offset
X (screen size / dimension)	Y (cm / inch)		Z (cm / inch)
60" / 130cm x 81cm 51.0" x 32.0"	168 / 66	202 / 79	12 / 4.5
80" / 170cm x 110cm 67.0" x 43.0"	225 / 88	270 / 106	15 / 6.1
100" / 220cm x 130cm 87.0" x 51.0"	281 / 111	338 / 133	19 / 7.6
200" / 430cm x 270cm 169.0" x 106.0"	566 / 223	680 / 268	38 / 15.1